





# SPACESAVER™ SYSTEMS

## AVR45 INTERLOCK™ MODULE

### 24/48 VOLT SYSTEM DIMENSIONS

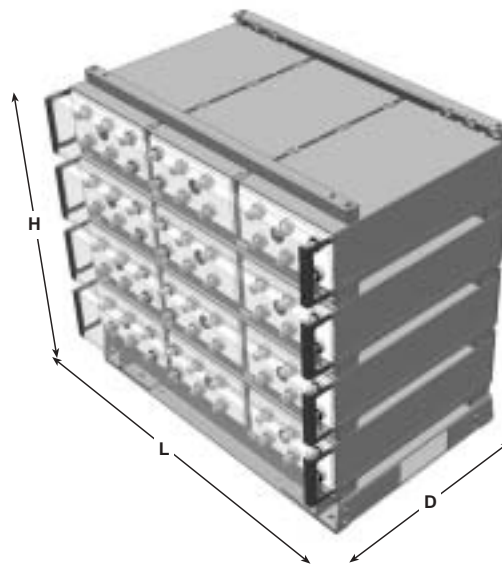

No. Cells/Module	No. Plates/Cell	System Volts	No. Stacks	No. of Modules High	Total No. of Modules	Capacity C/8 @ 1.75 vpc	Dimensions			
							Length (mm)	Depth <sup>1</sup> (mm)	Height <sup>2</sup> (mm)	Weight <sup>3</sup> (kgs.)
6	5	24	1	2	2	<b>90</b>	14.55" (370)	18.25" (464)	21.58" (548)	358 lbs. (162)
	5	48	1	4	4	<b>90</b>	14.55" (370)		37.66" (957)	678 lbs. (308)
	7	24	1	2	2	<b>140</b>	19.00" (483)		21.58" (548)	465 lbs. (211)
	7	48	1	4	4	<b>140</b>	19.00" (483)		37.66" (957)	887 lbs. (402)
	9	24	1	2	2	<b>185</b>	23.50" (597)		21.58" (548)	575 lbs. (261)
	9	48	1	4	4	<b>185</b>	23.50" (597)		37.66" (957)	1103 lbs. (500)
	11	24	1	2	2	<b>230</b>	28.00" (711)		21.58" (548)	683 lbs. (310)
	11	48	1	4	4	<b>230</b>	28.00" (711)		37.66" (957)	1315 lbs. (596)
	13	24	1	2	2	<b>275</b>	32.50" (826)		21.58" (548)	791 lbs. (359)
	13	48	1	4	4	<b>275</b>	32.50" (826)		37.66" (957)	1527 lbs. (693)
	15	24	1	2	2	<b>320</b>	37.00" (940)		21.58" (548)	900 lbs. (408)
	15	48	1	4	4	<b>320</b>	37.00" (940)		37.66" (957)	1740 lbs. (789)

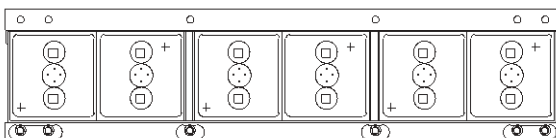

**6 Cell (5–15 plates)**

<sup>1</sup> Includes module and front shield.

<sup>2</sup> Height includes 4" base support.

For overall height dimension (top termination) add top bracket (1.5") and terminal shield (6.25").

<sup>3</sup> Weight includes cells, module and base support, but not the cell hardware.




# SPACESAVER™ SYSTEMS

## AVR45 INTERLOCK™ MODULE

### 24/48 VOLT SYSTEM DIMENSIONS *(cont.)*

No. Cells/Module	No. Plates/Cell	System Volts	No. Stacks	No. of Modules High	Total No. of Modules	Capacity C/8 @ 1.75 vpc	Dimensions			
							Length (mm)	Depth <sup>1</sup> (mm)	Height <sup>2</sup> (mm)	Weight <sup>3</sup> (kgs.)
4	5	24	1	3	3	<b>90</b>	9.70" (246)	18.25" (464)	29.62" (752)	353 lbs. (160)
	5	48	1	6	6	<b>90</b>	9.70" (246)		53.74" (1365)	671 lbs. (304)
	7	24	1	3	3	<b>140</b>	12.66" (322)		29.62" (752)	461 lbs. (209)
	7	48	1	6	6	<b>140</b>	12.66" (322)		53.74" (1365)	884 lbs. (401)
	9	24	1	3	3	<b>185</b>	15.66" (398)		29.62" (752)	566 lbs. (257)
	9	48	1	6	6	<b>185</b>	15.66" (398)		53.74" (1365)	1091 lbs. (495)
	11	24	1	3	3	<b>230</b>	18.66" (474)		29.62" (752)	673 lbs. (305)
	11	48	1	6	6	<b>230</b>	18.66" (474)		53.74" (1365)	1303 lbs. (591)
	13	24	1	3	3	<b>275</b>	21.66" (550)		29.62" (752)	781 lbs. (354)
	13	48	1	6	6	<b>275</b>	21.66" (550)		53.74" (1365)	1516 lbs. (688)
	15	24	1	3	3	<b>320</b>	24.66" (626)		29.62" (752)	886 lbs. (402)
	15	48	1	6	6	<b>320</b>	24.66" (626)		53.74" (1365)	1723 lbs. (782)

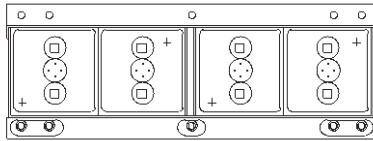

**4 Cell (5–15 plates)**

- <sup>1</sup> Includes module and front shield.
- <sup>2</sup> Height includes 4" base support.  
For overall height dimension (top termination) add top bracket (1.5") and terminal shield (6.25").
- <sup>3</sup> Weight includes cells, module and base support, but not the cell hardware.

"POWERED FOR PERFORMANCE"™

DISTRIBUTED BY:

**EAST PENN manufacturing co., inc.**

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

**Order Department Hotline: 610-682-3262**

www.eastpennunigy.com • e-mail: sales@eastpennunigy.com

E.P.M. Form No. 1146 6/04

© 2004 by EPM Printed in U.S.A.

All data subject to change without notice.  
No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.