





SPACESAVER™ SYSTEMS

AVR95 NON-INTERLOCK MODULE

24/48 VOLT SYSTEM DIMENSIONS

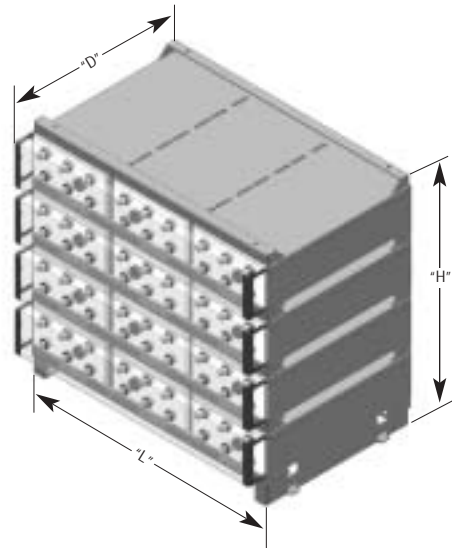

No. Cells/Module	No. Plates/Cell	System Volts	No. Stacks	No. of Modules High	Total No. of Modules	Capacity C/8 @ 1.75 vpc	Dimensions			
							Length (mm)	Depth ¹ (mm)	Height ² (mm)	Weight ³ (kgs.)
6	7	24	1	2	2	285	19.00" (483)	27.12" (689)	20.08" (510)	706 lbs. (320)
	7	48	1	4	4	285	19.00" (483)		36.16" (918)	1384 lbs. (628)
	9	24	1	2	2	380	23.50" (597)		20.08" (510)	880 lbs. (399)
	9	48	1	4	4	380	23.50" (597)		36.16" (918)	1732 lbs. (786)
	11	24	1	2	2	475	28.00" (711)		20.08" (510)	1052 lbs. (477)
	11	48	1	4	4	475	28.00" (711)		36.16" (918)	2076 lbs. (942)
	13	24	1	2	2	570	32.50" (826)		20.08" (510)	1228 lbs. (557)
	13	48	1	4	4	570	32.50" (826)		36.16" (918)	2428 lbs. (1101)
	15	24	1	2	2	665	37.00" (940)		20.08" (510)	1404 lbs. (637)
	15	48	1	4	4	665	37.00" (940)		36.16" (918)	2780 lbs. (1261)

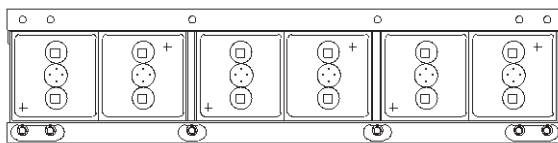

6 Cell (7-15 plates)

¹ Includes module and front shield.

² Height includes base support.
For overall height dimension (top termination) add top bracket (1.5") and terminal shield (6.25").

³ Weight includes cells, module and base support, but not the cell hardware.




SPACESAVER™ SYSTEMS

AVR95 NON-INTERLOCK MODULE

24/48 VOLT SYSTEM DIMENSIONS *(cont.)*

No. Cells/Module	No. Plates/Cell	System Volts	No. Stacks	No. of Modules High	Total No. of Modules	Capacity C/8 @ 1.75 vpc	Dimensions			
							Length (mm)	Depth ¹ (mm)	Height ² (mm)	Weight ³ (kgs.)
3	17	24	1	4	4	760	21.90" (556)	27.12" (689)	36.16" (918)	1644 lbs. (746)
	17	48	1	8	8	760	21.90" (556)		68.32" (1735)	3260 lbs. (1479)
	19	24	1	4	4	855	24.15" (613)		36.16" (918)	1820 lbs. (826)
	19	48	1	8	8	855	24.15" (613)		68.32" (1735)	3612 lbs. (1638)
	21	24	1	4	4	950	26.40" (671)		36.16" (918)	1992 lbs. (904)
	21	48	1	8	8	950	26.40" (671)		68.32" (1735)	3956 lbs. (1794)
	23	24	1	4	4	1045	28.65" (728)		36.16" (918)	2168 lbs. (983)
	23	48	1	8	8	1045	28.65" (728)		68.32" (1735)	4308 lbs. (1954)
	25	24	1	4	4	1140	30.90" (785)		36.16" (918)	2340 lbs. (1061)
	25	48	1	8	8	1140	30.90" (785)		68.32" (1735)	4652 lbs. (2110)
	27	24	1	4	4	1235	33.15" (842)		36.16" (918)	2500 lbs. (1134)
	27	48	1	8	8	1235	33.15" (842)		68.32" (1735)	4972 lbs. (2255)
	29	24	1	4	4	1330	35.40" (899)		36.16" (918)	2688 lbs. (1219)
	29	48	1	8	8	1330	35.40" (899)		68.32" (1735)	5348 lbs. (2426)
	31	24	1	4	4	1425	37.65" (956)		36.16" (918)	2848 lbs. (1292)
	31	48	1	8	8	1425	37.65" (956)		68.32" (1735)	5668 lbs. (2571)
33	24	1	4	4	1520	39.90" (1013)	36.16" (918)	3024 lbs. (1372)		
33	48	1	8	8	1520	39.90" (1013)	68.32" (1735)	6020 lbs. (2731)		

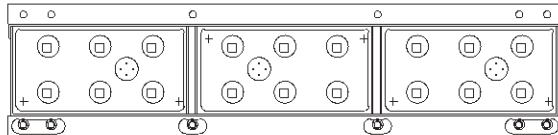

3 Cell (17–33 plates)

- ¹ Includes module and front shield.
- ² Height includes base support.
For overall height dimension (top termination) add top bracket (1.5") and terminal shield (6.25").
- ³ Weight includes cells, module and base support, but not the cell hardware.

"POWERED FOR PERFORMANCE"™

DISTRIBUTED BY:

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-3262

www.eastpennunigy.com • e-mail: sales@eastpennunigy.com

E.P.M. Form No. 1150 6/04

© 2004 by EPM Printed in U.S.A.

All data subject to change without notice.
No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.